

# Discharge Oil Mist Filters (External Drain)

## EE Series

### Benefits

- Compact, low profile design
- Easy field maintenance

### Features

- Captures oil fog, mist or aerosol from discharge of oil sealed vacuum pumps
- Seamless drawn housings
- Corrosive resistant white powder coat carbon steel
- EE-PSG925 assemblies come standard in zinc nickel finish
- 1/8" external drain




### Technical Specifications

- 0.3 micron media; 99.97% efficiency
- Continuous operating temp: 20°C (68°F) to 80°C (180°F)
- Back pressure valve designed to release element at 0,5 bar (7.35 PSI) differential for pump safety

### Options

- Additional ISO flange connections
- Non-standard finishes available

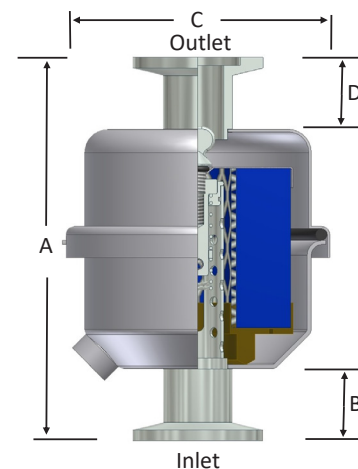

Inlet Type	Outlet Type	Assembly m <sup>3</sup> /hr Rating	Assembly Part Number	Dimensions - mm				Suggested Service ht. mm	Replacement Element Part No.	Element m <sup>3</sup> /hr Rating
				A	B	C	D			
3/4" NPT	1/2" NPSC	14	EE-GL915-075	116	28	83	13	60	GL915	14
16 mm ISO Flange	16 mm ISO Flange	14	EE-GL915-NW16	119	22	83	22	60	GL915	14
25 mm ISO Flange	25 mm ISO Flange	14	EE-GL915-NW2516	119	22	83	22	60	GL915	14
25 mm ISO Flange	25 mm ISO Flange	34	EE-PSG925-NW25	186	22	133	22	124	PSG925	34

Note: NW2516 designation: unit has an ISO NW25 flange with a 16 mm tube (neck).

See Oil Mist Discharge Filter Technical Data for sizing guidelines.

Rev: EE-M21.12C2

[www.solbergmfg.com](http://www.solbergmfg.com)

Australia & New Zealand  
Phone: +61 3 9764 9764  
ausales@solbergmfg.com

Southeast Asia & Taiwan  
Phone: +65 8855 4452  
SEasia-sales@solbergmfg.com